



GOLDEN EAGLE®



Certificate Number: 70158



Loading
Capability
150Kgs




Full swivel safety shoe can be used
with tread down or in spike position.



Solid aluminium
gravity latch ensure
fail safe locking
and easier method
for securing fly and
base section.



FIBRE GLASS LADDER

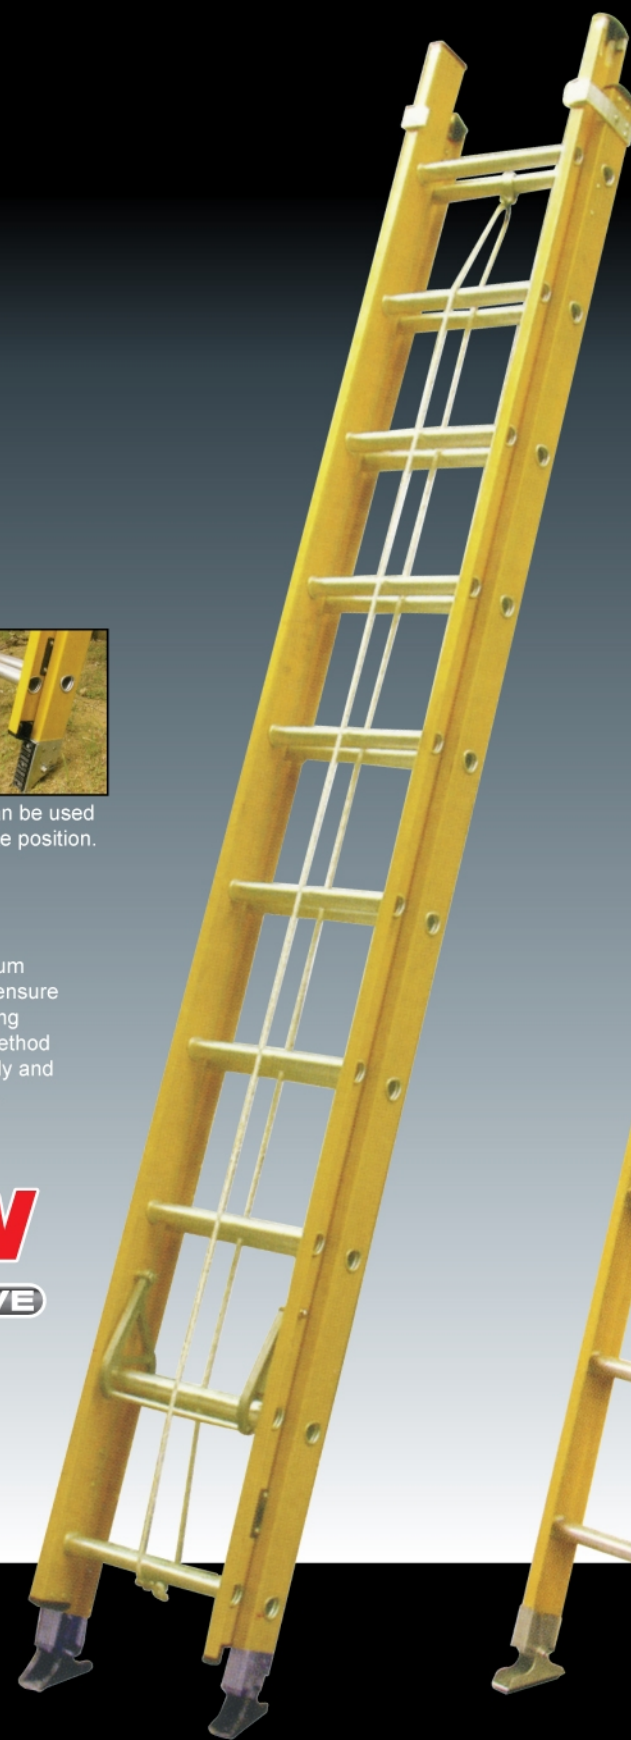

**Fibre Glass
Double Extension Ladder**



**Fibre Glass
Single Pole Ladder**



**Fibre Glass A Type
Double Side Ladder**



**Fibre Glass A Type
Single Side Ladder**



OFFICE STEEL LADDER



- ~ Mild Steel Material
- ~ Easy Storage
- ~ Strongly Support



Suitable for Household and office use

Max Load : 150kgs

Code No	Steps	Total Height	Platform Height	Weight
OSL-2	2	1000 mm	480 mm	4.30 kg
OSL-3	3	1250 mm	720 mm	6.30 kg
OSL-4	4	1510 mm	960 mm	8.30 kg
OSL-5	5	1780 mm	1210 mm	10.0 kg

GS INDUSTRIES PTE LTD 高昇

TEL : 6100 1565 FAX : 6365 6918

EMAIL : sales@shanyang.com.sg WEB : www.shanyang.com.sg



GOLDEN EAGLE®


Duty Rating 150kg

Step Ladder

Designed for general household application to renovation works where large platform serves as tools or foot rest.

- **Available from 3 to 8 steps**
- **Extra large platform**
- **Safety handrail**
- **Natural anodized for durability**

MODEL	STEPS	TOTAL LENGTH (mm)	PLATFORM LENGTH (mm)	WEIGHT (kg)
G-10003	3	1170	585	2.60
G-10004	4	1380	780	3.10
G-10005	5	1590	975	3.60
G-10006	6	1800	1175	4.10
G-10007	7	2010	1365	4.60
G-10008	8	2220	1560	5.10

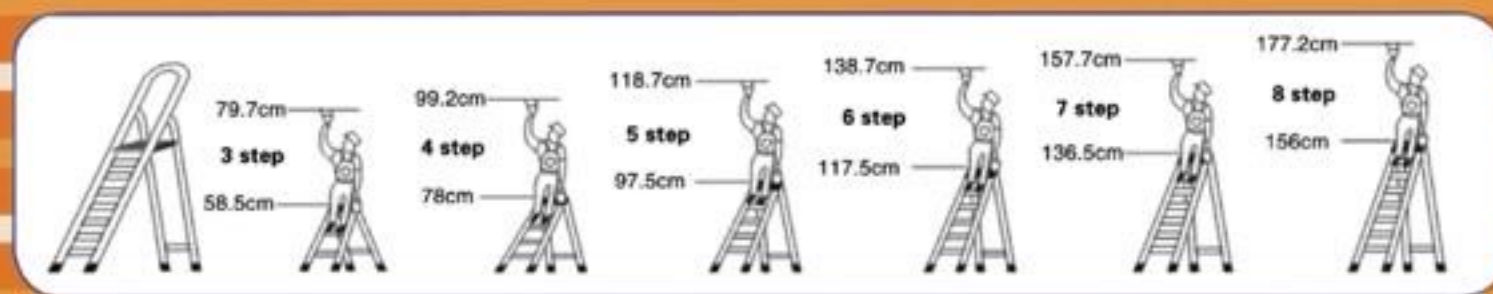



Multi Purpose Ladder



- ~ Aluminium material
- ~ 150 kg Load Capacity
- ~ Multiple Usage Configuration
- ~ Strong Locking system
- ~ Easy Carry Around & Storage

Steps	Fold	Height		Weight
		A Type	Straight	
8' (ft)	2 step x 4f	1.25 mtr	2.6 mtr	8.60 kg
12' (ft)	3 step x 4f	1.76 mtr	3.6 mtr	10.20 kg
16' (ft)	4 step x 4f	2.35 mtr	4.7 mtr	11.80 kg
20' (ft)	5 step x 4f	2.90 mtr	5.7 mtr	14.70 kg

Additional Accessories



GS INDUSTRIES PTE LTD 高昇

Tel : 6100 1565 Fax : 63656918



高 昇

GS INDUSTRIES PTE LTD

Blk 6, Marsiling Industrial Estate Road 1, #01-20 (S) 739275
Website : www.shanyang.com.sg Email : sales@shanyang.com.sg
Tel : 6100 1565 Fax : 6365 6918


GOLDEN EAGLE®

ALUMINIUM TWO WAY COMBINATION LADDER



'A' shape



Straight

Load Capacity : 100 kg

Code No	Steps	Height -mm (Straight)	Height-mm (A Frame)	Weight (kg)
DP03	06	1588 mm	788 mm	5.0
DP04	08	2108 mm	1058 mm	5.8
DP05	10	2628 mm	1318 mm	6.7
DP06	12	3148 mm	1560 mm	7.6
DP07	14	3663 mm	1838 mm	8.5
DP08	16	4188 mm	2088 mm	9.4

高 昇

GS INDUSTRIES PTE LTD

LADDER PRODUCTS



GOLDEN EAGLE®



ALUMINIUM CAP LADDER



FIBERGLASS CAP LADDER



ALUMINIUM 'A' FRAME LADDER
(SINGLE OR DOUBLE SIDE)



SAFETY 'A' LADDER
(SINGLE OR DOUBLE SIDE)



FIBERGLASS 'A' LADDER
(SINGLE OR DOUBLE SIDE)



ALUMINIUM
FAMILY LADDER




ALUMINIUM TWO WAY
COMBINATION LADDER



ALUMINIUM
MULTI PURPOSE LADDER



CAT LADDER WITH
CASTING BRACKET

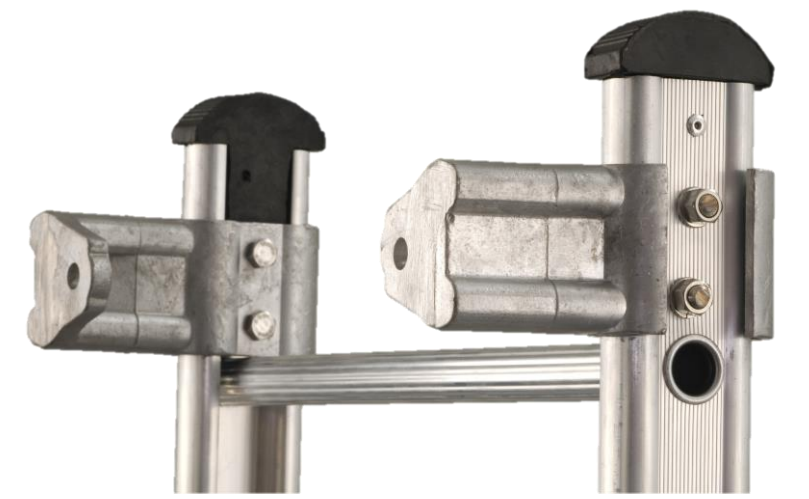

ALUMINIUM WORKING
PLATFORM LADDER



ALUMINIUM FIREMAN LADDER
(SINGLE / DOUBLE / TRIPLE EXTENSION)



HOOK
(ADD ON ITEM)



CUSTOM MADE
PLATFORM LADDER



HANDLE



CASEMENT TRAP DOOR



FIBERGLASS FIREMAN LADDER
(SINGLE OR DOUBLE EXTENSION)



TT LADDERS



- > Aluminum material
- > Strongly support
- > Lock system
- > Easy storage
- > Custom size available



**With Removable Guard Rail
(only for 500mm Width)**



高 昇 GS INDUSTRIAL PTE LTD

Blk 6 Marsiling Industrial Estate Road 1 #01-20 (S) 739275

Tel : (02) 6100 1565 Fax : (02) 6365 6918

Email : sales@shanyang.com.sg



Width : 300mm

Steps	Height	x	Width	x	Length
03 Steps	820 mm	x	300 mm	x	820 mm
	935 mm	x	300 mm	x	935 mm
04 Steps	1090 mm	x	300 mm	x	1090 mm

Width : 450mm

Steps	Height	x	Width	x	Length
03 Steps	750 mm	x	450 mm	x	1000 mm
	820 mm	x	450 mm	x	1000 mm

Width : 500mm (with Removable Guard Rail)

Steps	Height	x	Width	x	Length
03 Steps	750 mm	x	500 mm	x	1000 mm
	820 mm	x	500 mm	x	1000 mm



FIBERGLASS FIREMAN LADDER

Material : Body Fiberglass / Step Aluminium

Load Capacity : 150 kg
Ladder Width : 430 mm



SINGLE POLE

No of Steps	Height (FT)	Height (Meter)
08	8.00	2.46
10	9.96	3.03
12	11.83	3.60
14	13.7	4.17
16	15.57	4.74
18	17.44	5.31
20	19.31	5.88

DOUBLE EXTENSION

No of Steps	Height (FT)	Height (Extended) (Meter)
16	8 x 8	3.99
20	10 x 10	5.13
24	12 x 12	5.98
28	14 x 14	7.12
32	16 x 16	7.98
36	18 x 18	9.12
40	20 x 20	10.26



Extension Hook



GS INDUSTRIES PTE LTD

Tel : 6100 1565

Fax : 6365 6918

Email : sales@shanyang.com.sg Website : www.shanyang.com.sg

Address : Blk 6, Marsiling Industrial Estate Road 1 , #01-20 (S) 739275



ALUMINIUM FIREMAN LADDER

Ladder Width : 350mm
Load Capacity : 150kg



Add on Steel Hook



SINGLE POLE

No of Steps	Height (FT)	Height (M)
07	8	2.4
09	10	3.0
11	12	3.6
12	13.2	4.0
14	15	4.5
16	16.5	5.0
17	18	5.5
19	20	6.0

DOUBLE EXTENSION

No of Steps	Height (FT)	Height (M) (Extended)
13	8 x 8	4.35
17	10 x 10	5.52
21	12 x 12	6.42
23	13.2 x 13.2	7.42
27	15 x 15	8.24
31	16.5 x 16.5	9.33
33	18 x 18	10.14
37	20 x 20	11.25

TRIPLE EXTENSION

No of Steps	Height (FT)	Height (M) (Extended)
18	8 x 8 x 8	5.91
24	10 x 10 x 10	7.68
30	12 x 12 x 12	9.18
33	13.2 x 13.2 x 13.2	10.49
39	15 x 15 x 15	11.92
45	16.5 x 16.5 x 16.5	13.60
48	18 x 18 x 18	14.71
54	20 x 20 x 20	16.41

GS INDUSTRIES PTE LTD

TEL : 6100 1565 FAX : 6365 6918

Email : sales@shanyang.com.sg



高昇 GS INDUSTRIES PTE LTD

BLOCK 6, MARSILING INDUSTRIAL ESTATE ROAD 1, #01-20 (S) 739275

WHATSAPP : 8459 4586 TEL : 6100 1565 FAX : 6365 6918

FIBERGLASS A TYPE PLATFORM LADDER



PLATFORM SIZE : 420MM X 480MM

A^{PL}

LOAD CAPACITY : 150 KG

CODE NO	STEPS	CLOSED HEIGHT	PLATFORM HEIGHT	BOTTOM STEP WIDTH	WEIGHT
FG- APL – 03	03	1880 MM	880 MM	610 MM	11.6 KG
FG- APL – 04	04	2180 MM	1165 MM	650 MM	13.4 KG
FG- APL – 05	05	2490 MM	1455 MM	690 MM	15.3 KG
FG- APL – 06	06	2790 MM	1745 MM	730 MM	17.2 KG
FG- APL – 07	07	3100 MM	2035 MM	770 MM	18.9 KG
FG- APL – 08	08	3400 MM	2325 MM	810 MM	21.0 KG
FG- APL – 09	09	3710 MM	2615 MM	850 MM	23.1 KG



高昇

GS INDUSTRIES PTE LTD

BLOCK 6, MARSILING INDUSTRIAL ESTATE ROAD 1, #01-20 (S) 739275



WHATSAPP : 8459 4586 TEL : 6100 1565 FAX : 6365 6918

ALUMINIUM A FRAME LADDER

LOAD CAPACITY (KG)	SUPER HEAVY DUTY (200 KG)	HEAVY DUTY (150 KG)	MEDIUM DUTY (120 KG)	LIGHT DUTY (100 KG)
STEPS	02 - 24 STEPS	02 - 24 STEPS	02 - 12 STEPS	02 - 12 STEPS



SINGLE SIDE



DOUBLE SIDE

STEPS	HEIGHT	HEIGHT
02	1.6 FT	0.48 M
03	2.5 FT	0.76 M
04	3.3 FT	1.00 M
05	4.2 FT	1.30 M
06	5.0 FT	1.50 M
07	5.8 FT	1.77 M
08	6.7 FT	2.05 M
09	7.5 FT	2.30 M
10	8.3 FT	2.53 M
11	9.2 FT	2.80 M
12	10.0 FT	3.00 M
13	10.8 FT	3.20 M
14	11.6 FT	3.50 M
15	12.5 FT	3.80 M
16	13.3 FT	4.05 M
17	14.2 FT	4.30 M
18	15.0 FT	4.60 M
19	15.8 FT	4.80 M
20	16.7 FT	5.10 M
21	17.5 FT	5.30 M
22	18.3 FT	5.80 M
23	19.2 FT	5.90 M
24	20.0 FT	6.10 M



高昇 GS INDUSTRIES PTE LTD

BLOCK 6, MARSILING INDUSTRIAL ESTATE ROAD 1, #01-20 (S) 739275

WHATSAPP : 8459 4586 TEL : 6100 1565 FAX : 6365 6918

ALUMINIUM A TYPE PLATFORM LADDER

BS EN131 STANDARD WITH PSB CERTIFICATE OF CONFORMITY

GUARD RAIL HEIGHT 1000MM

LOAD CAPACITY : 200 KG

PLATFORM SIZE : 610MM X 460MM



CAP

CODE NO	STEPS	CLOSED HEIGHT	PLATFORM HEIGHT	BOTTOM STEP WIDTH	WEIGHT
AL- CAP - 03	03	1820 MM	750 MM	630 MM	14.3 KG
AL- CAP - 04	04	2080 MM	1000 MM	650 MM	16.2 KG
AL- CAP - 05	05	2350 MM	1260 MM	660 MM	17.6 KG
AL- CAP - 06	06	2560 MM	1500 MM	680 MM	19.0 KG
AL- CAP - 07	07	2830 MM	1730 MM	690 MM	20.0 KG
AL- CAP - 08	08	3050 MM	1980 MM	710 MM	22.5 KG
AL- CAP - 09	09	3320 MM	2260 MM	730 MM	24.2 KG
AL- CAP - 10	10	3580 MM	2490 MM	750 MM	26.6 KG
AL- CAP - 11	11	3860 MM	2750 MM	770 MM	28.2 KG
AL- CAP - 12	12	4100 MM	3000 MM	790 MM	30.5 KG
AL- CAP - 13	13	4310 MM	3180 MM	810 MM	32.5 KG
AL- CAP - 14	14	4600 MM	3440 MM	830 MM	34.0 KG
AL- CAP - 15	15	4850 MM	3690 MM	850 MM	37.2 KG
AL- CAP - 16	16	5100 MM	3950 MM	880 MM	38.5 KG

GUARD RAIL HEIGHT 1000MM

LOAD CAPACITY : 150 KG

PLATFORM SIZE : 510MM X 405MM



APL

CODE NO	STEPS	CLOSED HEIGHT	PLATFORM HEIGHT	BOTTOM STEP WIDTH	WEIGHT
AL- APL - 03	03	1820 MM	750 MM	580 MM	10.5 KG
AL- APL - 04	04	2080 MM	1000 MM	610 MM	11.5 KG
AL- APL - 05	05	2350 MM	1260 MM	640 MM	12.6 KG
AL- APL - 06	06	2560 MM	1500 MM	670 MM	13.5 KG
AL- APL - 07	07	2830 MM	1730 MM	700 MM	14.5 KG
AL- APL - 08	08	3050 MM	1980 MM	730 MM	15.5 KG
AL- APL - 09	09	3320 MM	2260 MM	760 MM	16.8 KG



高昇 GS INDUSTRIES PTE LTD

BLOCK 6, MARSILING INDUSTRIAL ESTATE ROAD 1, #01-20 (S) 739275



WHATSAPP : 8459 4586 TEL : 6100 1565 FAX : 6365 6918

FIBERGLASS 'A' FRAME LADDER



Single Side



All dimension in $\pm$



Double Side

Load Capacity : 150 kg

Code No / Steps	Closed Height	Open Height	Foot Width	Weight
FGA-M-03	03 ft. - 914 mm	910 mm	410 mm	6.0 kg
FGA-M-04	04 ft. - 1219 mm	1210 mm	500 mm	7.7 kg
FGA-M-05	05 ft. - 1524 mm	1420 mm	530 mm	9.5 kg
FGA-M-06	06 ft. - 1828 mm	1800 mm	590 mm	10.6 kg
FGA-M-07	07 ft. - 2133 mm	2000 mm	610 mm	12.2 kg
FGA-M-08	08 ft. - 2438 mm	2400 mm	680 mm	14.5 kg
FGA-M-09	09 ft. - 2743 mm	2570 mm	700 mm	16.0 kg
FGA-M-10	10 ft. - 3048 mm	2980 mm	760 mm	18.5 kg
FGA-M-12	12 ft. - 3657 mm	3450 mm	830 mm	22.0 kg
FGA-M-14	14 ft. - 4267 mm	4000 mm	900 mm	26.0 kg
FGA-M-16	16 ft. - 4876 mm	4600 mm	1005 mm	30.5 kg
FGA-M-18	18 ft. - 5486 mm	5170 mm	1085 mm	35.5 kg



高昇 GS INDUSTRIES PTE LTD

BLOCK 6, MARSILING INDUSTRIAL ESTATE ROAD 1, #01-20 (S) 739275

WHATSAPP : 8459 4586 TEL : 6100 1565 FAX : 6365 6918

FIBERGLASS 'A' FRAME LADDER



Single Side only

Load Capacity : 150 kg

All dimension in $\pm$

Code No / Steps	Closed Height	Open Height	Foot Width	Weight
FGA-C-03	965 mm	880 mm	440 mm	4.4 kg
FGA-C-04	1270 mm	1160 mm	480 mm	5.5 kg
FGA-C-05	1575 mm	1440 mm	520 mm	6.5 kg
FGA-C-06	1880 mm	1730 mm	560 mm	7.7 kg
FGA-C-07	2185 mm	2010 mm	600 mm	8.9 kg
FGA-C-08	2490 mm	2300 mm	640 mm	9.9 kg
FGA-C-09	2795 mm	2570 mm	680 mm	11.4 kg
FGA-C-10	3100 mm	2890 mm	720 mm	13.1 kg
FGA-C-12	3710 mm	3460 mm	800 mm	16.6 kg



高昇 GS INDUSTRIES PTE LTD

BLOCK 6, MARSILING INDUSTRIAL ESTATE ROAD 1, #01-20 (S) 739275

WHATSAPP : 8459 4586 TEL : 6100 1565 FAX : 6365 6918

Safety A Ladder



Features for **Aluminum** Safety A Ladder

- ✓ Durable 6063 T-5 anodized aluminum alloy
- ✓ Non-slip gridding
- ✓ Duty rating 150kg & 200kg
- ✓ Foldable for easy storage & transportation

Code No	Steps	Closed Height	Standing Height
SAL-05	05	1300 mm	480 mm
SAL-06	06	1500 mm	760 mm
SAL-07	07	1770 mm	1000 mm
SAL-08	08	2050 mm	1300 mm
SAL-09	09	2300 mm	1500 mm
SAL-10	10	2530 mm	1770 mm
SAL-11	11	2800 mm	2050 mm
SAL-12	12	3000 mm	2300 mm
SAL-13	13	3300 mm	2530 mm
SAL-14	14	3500 mm	2800 mm
SAL-15	15	3800 mm	3300 mm
SAL-16	16	4050 mm	3300 mm
SAL-17	17	4300 mm	3500 mm
SAL-18	18	4600 mm	3800 mm



Features for **Fiberglass** Safety A Ladder

- ✓ Non Static Electricity Conductive
- ✓ Non-slip gridding
- ✓ Duty rating 150kg
- ✓ Suitable for electrical work



Code No	Steps	Closed Height	Standing Height
FG-SAL-06	06	1830 mm	915 mm
FG-SAL-07	07	2130 mm	1220 mm
FG-SAL-08	08	2440 mm	1530 mm
FG-SAL-09	09	2740 mm	1830 mm
FG-SAL-10	10	3050 mm	2130 mm
FG-SAL-11	11	3350 mm	2440 mm
FG-SAL-12	12	3660 mm	2740 mm
FG-SAL-13	13	3960 mm	3050 mm
FG-SAL-14	14	4270 mm	3350 mm
FG-SAL-15	15	4570 mm	3660 mm

A Type Platform Ladder

Patented Design: D2012/853/C

WSH (WORK AT HEIGHTS) REGULATIONS S18

Features for Aluminium Safety Ladder:

- ✓ Facilitate 3 Points Contact
- ✓ Ladder comes with hand rails and Rail Guards
- ✓ 610 x 460mm platform for safe working
- ✓ Ladder comes with safety chain
- ✓ Duty Rating of 200kg
- ✓ Ingerd 6063 T5 with anodized coating
- ✓ Non Slip Gridding
- ✓ Foldable for easy storage and transportation
- ✓ Corrosion resistance
- ✓ Durable and Long Lasting

**1 MAN OPERATION
W SAFETY CHAIN!**

**PSB TESTED
EN 131**

Code No	Steps	Closed Height	Bottom Step Width	Weight	Platform Height
AL- CAP - 03	3	1820 mm	630 mm	14.3 kg	750 mm
AL- CAP - 04	4	2080 mm	650 mm	16.2 kg	1000 mm
AL- CAP - 05	5	2350 mm	660 mm	17.6 kg	1260 mm
AL- CAP - 06	6	2560 mm	680 mm	19.0 kg	1500 mm
AL- CAP - 07	7	2830 mm	690 mm	20.0 kg	1730 mm
AL- CAP - 08	8	3050 mm	710 mm	22.5 kg	1980 mm
AL- CAP - 09	9	3320 mm	730 mm	24.2 kg	2260 mm
AL- CAP - 10	10	3580 mm	750 mm	26.6 kg	2490 mm
AL- CAP - 11	11	3860 mm	770 mm	28.2 kg	2750 mm
AL- CAP - 12	12	4100 mm	790 mm	30.5 kg	3000 mm
AL- CAP - 13	13	4310 mm	810 mm	32.5 kg	3180 mm
AL- CAP - 14	14	4600 mm	830 mm	34.0 kg	3440 mm
AL- CAP - 15	15	4850 mm	850 mm	37.2 kg	3690 mm
AL- CAP - 16	16	5100 mm	880 mm	38.5 kg	3950 mm

Safety chain to notify users of ladder edging

Shoulder bolt and nut on top hinge

Slip resistant checked plate platform

Full set of rear horizontals and verticals

Knee braced to provide sturdy support

Heavy duty side bracing

For more information, visit WSHC website or call +65 6692 4995:

<https://www.wshc.sg/wps/portal/bulletinview?action=viewBulletin&bulletinID=BU2010072015048>



A Type Platform Ladder

Patented Design: D2012/853/C

WSH (WORK AT HEIGHTS) REGULATIONS S18

Features for Fiberglass Safety Ladder:


In addition to the features of Aluminum Type:

- ✓ Non Static Electricity Conductive
- ✓ Hazard Free
- ✓ Heat Resistance
- ✓ Non Conductivity
- ✓ Suitable for electrical work
- ✓ 610 x 460mm platform for safe working

**1 MAN OPERATION
FOR ELECTRICIAN USE
W SAFETY CHAIN!**

**PSB TESTED
EN 131**

Code No	Steps	Closed Height	Bottom Step Width	Weight	Platform Height
FG- CAP - 03	3	1820 mm	630 mm	17.0 kg	750 mm
FG- CAP - 04	4	2150 mm	650 mm	18.0 kg	1000 mm
FG- CAP - 05	5	2350 mm	660 mm	19.0 kg	1260 mm
FG- CAP - 06	6	2600 mm	690 mm	21.0 kg	1500 mm
FG- CAP - 07	7	2870 mm	700 mm	22.0 kg	1730 mm
FG- CAP - 08	8	3120 mm	720 mm	24.2 kg	1980 mm
FG- CAP - 09	9	3380 mm	740 mm	26.0 kg	2260 mm
FG- CAP - 10	10	3630 mm	750 mm	28.8 kg	2490 mm
FG- CAP - 11	11	3920 mm	770 mm	30.0 kg	2750 mm
FG- CAP - 12	12	4130 mm	790 mm	32.0 kg	3000 mm
FG- CAP - 13	13	4220 mm	810 mm	35.0 kg	3240 mm
FG- CAP - 14	14	4380 mm	830 mm	36.5 kg	3480 mm
FG- CAP - 15	15	4640 mm	850 mm	38.5 kg	3740 mm
FG- CAP - 16	16	5130 mm	880 mm	41.0 kg	3980 mm

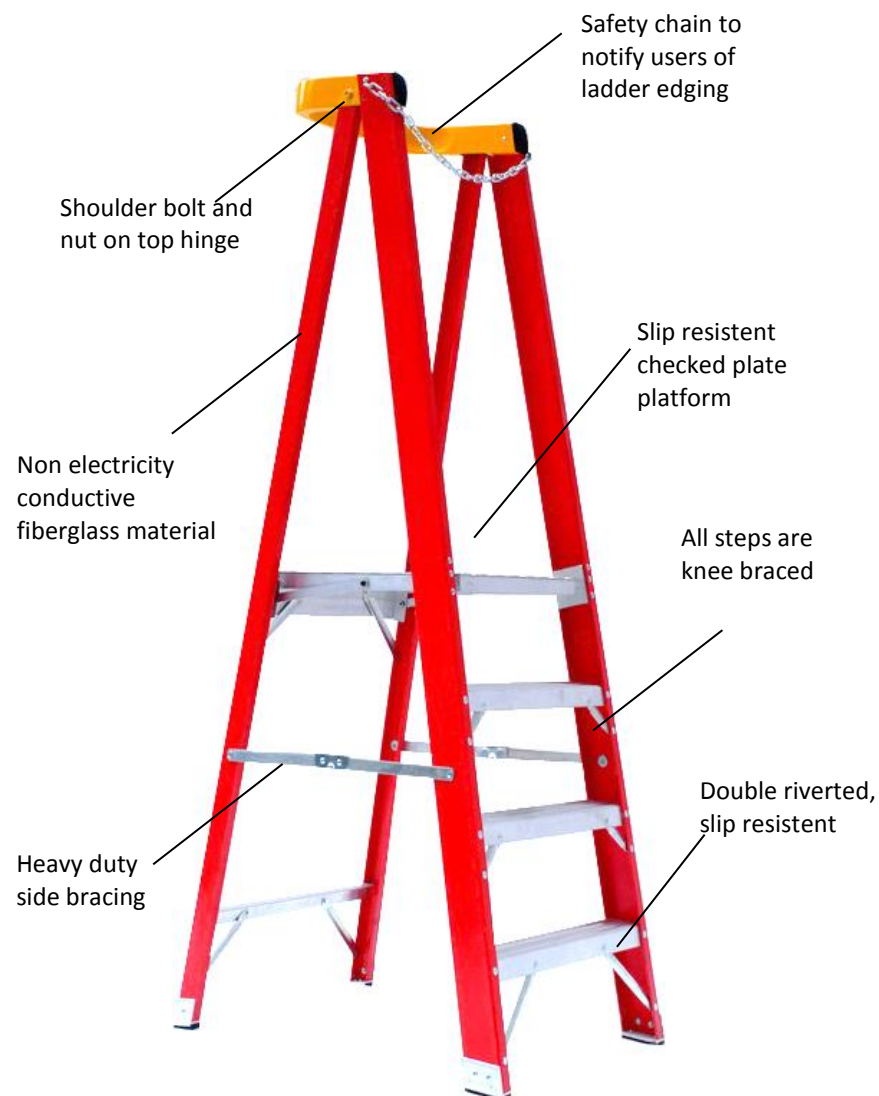

For more information, visit WSHC website or call +65 6692 4995:

<https://www.wshc.sg/wps/portal/bulletinview?action=viewBulletin&bulletinID=BU2010072015048>

TT LADDERS